


**Light Shaping Diffusers®**  
**E-Lite Low-cost Rolls**

Luminit low-cost E-Lite Light Shaping Diffusers homogenize and shape light with high transmission efficiency. These competitively-priced seamless rolls are available on 5 mil (125um) polyester substrates in 10°, 30° and 60° diffusion angles with circular output. Our E-Lite line provides precise beam control, eliminates striations and beam non-uniformity and supplies direct view homogenization. Available with a minimum order quantity of 1000ft., Luminit E-Lite offers customers Luminit quality diffusion at a bulk diffuser price.

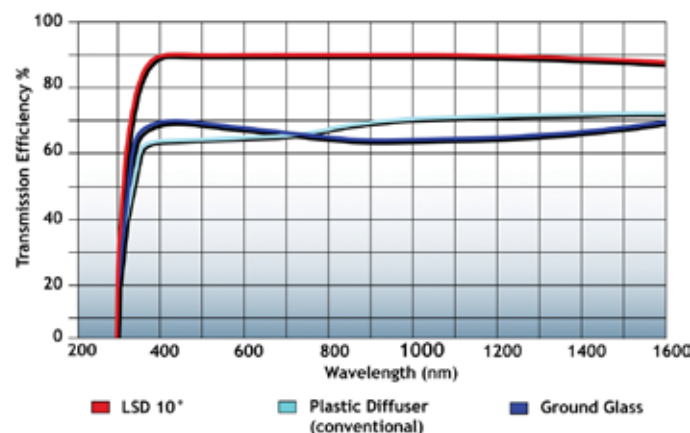


ANGLES	SUBSTRATE	THICKNESS	WIDTH	LENGTH/MOQ
10°, 30°, 60°	PE	5 mil (125um)	24"	1000 ft.

SPECIFICATIONS	
E-Lite Angle Range (FWHM):	Circular: 10°, 30°, 60°
Transmission Efficiency:	85% - 92%
Transmission Spectral Range:	300nm to 1500nm
Temperature Range:	-30°C to 80°C @ 240 hours
Humidity:	> 95% ± 5% RH @ 24 hours
Refractive Index:	PE=1.51
Pencil Hardness:	> 2H



**No Diffuser**



**E-Lite 30°  
FWHM Diffuser**